


A10597 U-bolt

U-bolt for SGP pipe



Part number A10597 U-bolt

Units (mm)


Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Size code	Screw diameter	General purpose			Size code	W¼ thread			Size code	W5/16 thread			Size code	W3/8 thread			Size code	W½ thread			Size code	W5/8 thread										
					P	H	S		P	H	S		P	H	S		P	H	S		P	H	S		P	H	S								
8A	¼	13.8	0137	W⅝ ₁₆				0014	21	23	18	0137				0180				0194															
10A	⅜	17.3			0029	25	26	18	0033	29.5	28		18	31	32		24	32	33		25														
15A	½	21.7			0048	34	32	18	0141	36	35		24	38	34		25																		
20A	¾	27.2			0052	41	34	25	0156	43	38		28	44	37		25																		
25A	1	34.0			0052	41	34	25	0156	43	38		28	0207	44		37	25																	
32A	1¼	42.7	0175	W⅝ ₁₆	52	43	28	0067	50.5	39	25	0175	52	43	28	0211	53	43	28	0320	62	71	40												
40A	1½	48.6	0226	60	51	35	0071	57	42	25	0226					60	51	35	0334								74	73	50						
50A	2	60.5	0245	W⅝ ₈	72	57	35	0086	70	47	25					0245	72	57	35								0334	74	73	50					
65A	2½	76.3	0250	W⅝ ₈	87	69	35	0103	83	59	30					0250	87	69	35								0349	90	81	50					
80A	3	89.1	0264	W⅝ ₈	100	75	35	0118	96	67	30					0264	100	75	35								0353	103	84	50					
90A	3½	101.6	0279	W⅝ ₈	113	81	35	0122	125	77	33					0279	113	81	35	0368	128	97	50	0419											
100A	4	114.3	0283	125	88	35	0283									125	88	35	0368									128	97	50					
125A	5	139.8	0372	W½	153	102	54									0298	152	108	55									0372	153	102	54	0423	184	121	60
150A	6	165.2	0387	W½	180	115	54									0315	180	115	54									0387	180	115	54	0438	236	161	70
200A	8	216.3	0404	W½	232	152	54																					0404	232	152	54				
250A	10	267.4	0442	W⅝ ₈	286	188	80																0442	286	188	80									
300A	12	318.5	0457	337	214	80	0457																				337	214	80	0461	373	232	80		
350A	14	355.6	0461	373	232	80																													
400A	16	406.4																																	
450A	18	457.2																																	
500A	20	508.0																																	

A10617 Stainless steel U-bolt

U-bolt for stainless steel pipe (thick-walled)

Part number A10617 Stainless steel U-bolt

Units (mm)

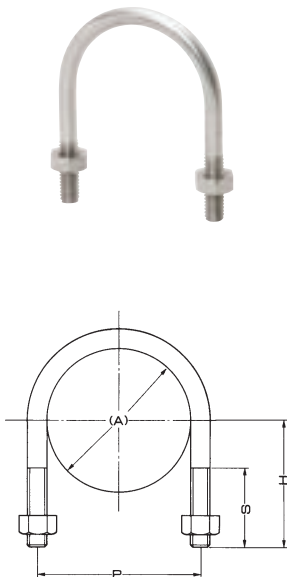

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	P	H	S
0019	8A	$\frac{1}{4}$	13.8	W $\frac{1}{4}$	21	23	18
0023	10A	$\frac{3}{8}$	17.3	W $\frac{1}{4}$	24	26	18
0038	15A	$\frac{1}{2}$	21.7	W $\frac{3}{8}$	34	36	28
0042	20A	$\frac{3}{4}$	27.2	W $\frac{3}{8}$	37	40	28
0057	25A	1	34.0	W $\frac{3}{8}$	45	43	30
0061	32A	1 $\frac{1}{4}$	42.7	W $\frac{3}{8}$	54	47	30
0076	40A	1 $\frac{1}{2}$	48.6	W $\frac{3}{8}$	60	51	30
0095	50A	2	60.5	W $\frac{3}{8}$	72	57	30
0108	65A	2 $\frac{1}{2}$	76.3	W $\frac{3}{8}$	87	69	35
0112	80A	3	89.1	W $\frac{3}{8}$	100	75	35
0127	100A	4	114.3	W $\frac{3}{8}$	125	88	35
0131	125A	5	139.8	W $\frac{1}{2}$	153	102	50
0146	150A	6	165.2	W $\frac{1}{2}$	180	115	50
0165	200A	8	216.3	W $\frac{1}{2}$	232	152	50
0170	250A	10	267.4	W $\frac{5}{8}$	286	188	80
0184	300A	12	318.5	W $\frac{5}{8}$	337	214	80

U-fixings

A10632 Dip-plated U-bolt


Made to order

U-bolt for SGP pipe

Part number A10632 Dip-plated U-bolt

Units (mm)

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	P	H	S
0015	15A	$\frac{1}{2}$	21.7	$W\frac{3}{8}$	31	30	25
0020	20A	$\frac{3}{4}$	27.2	$W\frac{3}{8}$	37	34	25
0034	25A	1	34.0	$W\frac{3}{8}$	43	37	25
0049	32A	$1\frac{1}{4}$	42.7	$W\frac{3}{8}$	52	43	28
0053	40A	$1\frac{1}{2}$	48.6	$W\frac{3}{8}$	60	51	35
0068	50A	2	60.5	$W\frac{3}{8}$	72	57	35
0072	65A	$2\frac{1}{2}$	76.3	$W\frac{3}{8}$	87	69	35
0087	80A	3	89.1	$W\frac{3}{8}$	100	75	35
0091	100A	4	114.3	$W\frac{3}{8}$	125	88	35
0104	125A	5	139.8	$W\frac{1}{2}$	153	102	54
0119	150A	6	165.2	$W\frac{1}{2}$	180	115	54
0123	200A	8	216.3	$W\frac{1}{2}$	232	152	54
0138	250A	10	267.4	$W\frac{3}{4}$	286	188	80
0142	300A	12	318.5	$W\frac{3}{4}$	337	214	80

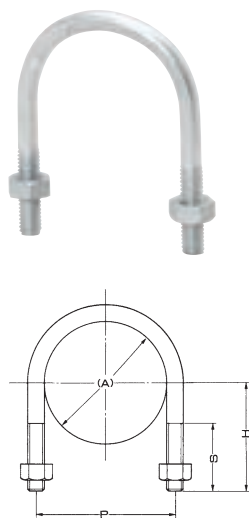


A10607 U-bolt for CL pipe

Floor band for coated steel pipe

Part number A10607 U-bolt for CL pipe

Units (mm)

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	P	H	S
0012	15A	$\frac{1}{2}$	25.7	$W\frac{3}{8}$	38	32	25
0027	20A	$\frac{3}{4}$	31.2	$W\frac{3}{8}$	44	35	25
0031	25A	1	37.6	$W\frac{3}{8}$	50	40	25
0046	32A	$1\frac{1}{4}$	46.3	$W\frac{3}{8}$	59	48	30
0065	40A	$1\frac{1}{2}$	52.2	$W\frac{3}{8}$	65	51	30
0070	50A	2	64.1	$W\frac{3}{8}$	77	57	30
0084	65A	$2\frac{1}{2}$	79.9	$W\frac{3}{8}$	93	70	35
0099	80A	3	92.7	$W\frac{3}{8}$	105	77	35
0101	100A	4	118.3	$W\frac{3}{8}$	130	90	35
0116	125A	5	143.8	$W\frac{1}{2}$	160	110	50
0135	150A	6	170.2	$W\frac{1}{2}$	186	125	50
0140	200A	8	221.3	$W\frac{1}{2}$	238	150	50

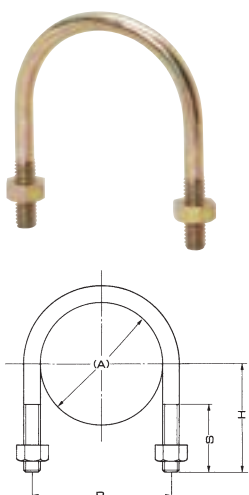

A10623 Stainless steel U-bolt for CL pipe

Confirm delivery


Floor band for coated steel pipe

Part number A10623

Stainless steel U-bolt for CL pipe

Units (mm)

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	P	H	S
0016	15A	$\frac{1}{2}$	25.7	$W\frac{3}{8}$	38	32	25
0035	20A	$\frac{3}{4}$	31.2	$W\frac{3}{8}$	44	35	25
0040	25A	1	37.6	$W\frac{3}{8}$	50	40	25
0054	32A	$1\frac{1}{4}$	46.3	$W\frac{3}{8}$	59	48	30
0069	40A	$1\frac{1}{2}$	52.2	$W\frac{3}{8}$	65	51	30
0073	50A	2	64.1	$W\frac{3}{8}$	77	57	30
0088	65A	$2\frac{1}{2}$	79.9	$W\frac{3}{8}$	93	70	35
0092	80A	3	92.7	$W\frac{3}{8}$	105	77	35
0105	100A	4	118.3	$W\frac{3}{8}$	130	90	35
0110	125A	5	143.8	$W\frac{1}{2}$	160	110	50
0124	150A	6	170.2	$W\frac{1}{2}$	186	125	50
0139	200A	8	221.3	$W\frac{1}{2}$	238	150	50

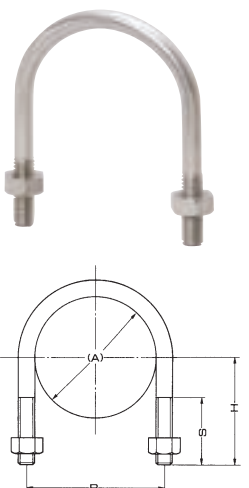

Long-shank U-bolt

Long-shank U-bolt + 30




Long-shank U-bolt + 50



A10599 Long-shank U-bolt + 30

A10600 Long-shank U-bolt + 50

U-bolt for SGP pipe / Long-shank type



Part number A10599 Long-shank U-bolt + 30
A10600 Long-shank U-bolt + 50

Units (mm)

Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	A10599 Long-shank U-bolt + 30					A10600 Long-shank U-bolt + 50				
			Size code	Screw diameter	P	H	S	Size code	Screw diameter	P	H	S
15A	1/2	21.7	0019	W 3/8	32	60	40	0011	W 3/8	32	80	40
20A	3/4	27.2	0023	W 3/8	40	64	50	0026	W 3/8	40	84	50
25A	1	34.0	0038	W 3/8	46	67	50	0045	W 3/8	46	87	50
32A	1 1/4	42.7	0042	W 3/8	53	76	50	0050	W 3/8	53	96	50
40A	1 1/2	48.6	0057	W 3/8	60	79	50	0064	W 3/8	60	99	50
50A	2	60.5	0061	W 3/8	72	85	50	0079	W 3/8	72	105	50
65A	2 1/2	76.3	0076	W 3/8	87	98	50	0083	W 3/8	87	118	50
80A	3	89.1	0095	W 3/8	100	105	50	0098	W 3/8	100	125	50
100A	4	114.3	0108	W 3/8	125	118	50	0115	W 3/8	125	138	50
125A	5	139.8	0112	W 1/2	153	140	70	0120	W 1/2	153	160	70
150A	6	165.2	0127	W 1/2	180	150	70	0134	W 1/2	180	170	70
200A	8	216.3	0131	W 1/2	232	178	80	0149	W 1/2	232	198	80
250A	10	267.4	0146	W 5/8	288	203	80	0153	W 5/8	288	223	80

Stainless steel long-shank U-bolt

Confirm delivery

Stainless steel long-shank U-bolt + 30




Stainless steel long-shank U-bolt + 50



A10619 Stainless steel long-shank U-bolt + 30

A10620 Stainless steel long-shank U-bolt + 50

U-bolt for stainless steel pipe (thick-walled) / Long-shank type



Part number A10619
Stainless steel long-shank U-bolt + 30
A10620
Stainless steel long-shank U-bolt + 50

Units (mm)

Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	A10619 Long-shank U-bolt + 30					A10620 Long-shank U-bolt + 50				
			Size code	Screw diameter	P	H	S	Size code	Screw diameter	P	H	S
15A	1/2	21.7	0013	W 3/8	32	60	40	0014	W 3/8	32	80	40
20A	3/4	27.2	0028	W 3/8	40	64	50	0029	W 3/8	40	84	50
25A	1	34.0	0032	W 3/8	46	67	50	0033	W 3/8	46	87	50
32A	1 1/4	42.7	0047	W 3/8	53	76	50	0048	W 3/8	53	96	50
40A	1 1/2	48.6	0051	W 3/8	60	79	50	0052	W 3/8	60	99	50
50A	2	60.5	0066	W 3/8	72	85	50	0067	W 3/8	72	105	50
65A	2 1/2	76.3	0085	W 3/8	87	98	50	0071	W 3/8	87	118	50
80A	3	89.1	0090	W 3/8	100	105	50	0086	W 3/8	100	125	50
100A	4	114.3	0102	W 3/8	125	118	50	0103	W 3/8	125	138	50
125A	5	139.8	0117	W 1/2	153	140	70	0118	W 1/2	153	160	70
150A	6	165.2	0121	W 1/2	180	150	70	0122	W 1/2	180	170	70
200A	8	216.3	0136	W 1/2	232	178	80	0137	W 1/2	232	198	80
250A	10	267.4	0155	W 5/8	288	203	80	0141	W 5/8	288	223	80

U-fixings

Dipped U-bolt series —Soft PVC-coated type—

Electrically insulated U-bolt / Soft PVC-coated type

A10603 Dipped U-bolt (SG)

For SGP pipe


Part number A10603 Dipped U-bolt (SG)

Units (mm)

Size code	Size	Nominal diameter	Applicable pipe outer diameter (SG)	Screw diameter	P	H	S	C	L	t
0013	SG- 15	$\frac{1}{2}$	21.7	$W\frac{3}{8}$	38	32	25	25	80	2.0
0028	SG- 20	$\frac{3}{4}$	27.2	$W\frac{3}{8}$	44	35	25	25	86	2.0
0032	SG- 25	1	34.0	$W\frac{3}{8}$	50	40	25	25	92	2.0
0047	SG- 32	$1\frac{1}{4}$	42.7	$W\frac{3}{8}$	59	48	30	25	101	2.0
0051	SG- 40	$1\frac{1}{2}$	48.6	$W\frac{3}{8}$	65	51	30	25	107	2.0
0066	SG- 50	2	60.5	$W\frac{3}{8}$	77	57	30	25	119	2.0
0085	SG- 65	$2\frac{1}{2}$	76.3	$W\frac{3}{8}$	93	70	35	25	135	2.0
0090	SG- 80	3	89.1	$W\frac{3}{8}$	105	77	35	25	148	2.0
0102	SG-100	4	114.3	$W\frac{3}{8}$	130	90	35	25	173	2.0
0117	SG-125	5	139.8	$W\frac{1}{2}$	160	110	50	32	213	2.0
0121	SG-150	6	165.2	$W\frac{1}{2}$	186	125	50	32	239	2.0
0136	SG-200	8	216.3	$W\frac{1}{2}$	238	150	50	32	290	2.0



Coating color: ivory ●



A10605 Dipped U-bolt (CU)

For copper pipe


Part number A10605 Dipped U-bolt (CU)

Units (mm)

Size code	Size	Applicable pipe outer diameter (CU)	Screw diameter	P	H	S	C	L	t
0018	CU- 8	9.53	$W\frac{1}{4}$	19	19	18	15	45	2.0
0022	CU- 10	12.70	$W\frac{1}{4}$	22	21	18	15	48	2.0
0037	CU- 15	15.88	$W\frac{1}{4}$	25	23	20	15	51	2.0
0041	CU- 19	19.05	$W\frac{1}{4}$	29	25	20	15	55	2.0
0056	CU- 20	22.22	$W\frac{1}{4}$	32	31	25	15	58	2.0
0179	5 (for air conditioning)	25.40	$W\frac{1}{4}$	35	33	25	15	61	2.0
0075	CU- 25	28.58	$W\frac{1}{4}$	38	34	25	15	64	2.0
0080	CU- 32	34.92	$W\frac{1}{4}$	44	37	25	15	70	2.0
0094	CU- 40	41.28	$W\frac{1}{4}$	51	40	25	15	77	2.0
0107	CU- 50	53.98	$W\frac{1}{4}$	63	46	25	15	89	2.0
0111	CU- 65	66.68	$W\frac{1}{4}$	78	59	30	15	102	2.0
0126	CU- 80	79.38	$W\frac{1}{4}$	89	64	30	15	115	2.0
0145	CU-100	104.78	$W\frac{1}{4}$	114	77	30	15	141	2.0
0150	CU-125	130.18	$W\frac{3}{8}$	143	95	35	25	189	2.0
0164	CU-150	155.58	$W\frac{3}{8}$	169	107	35	25	214	2.0



Coating color: black ●



A10606 Dipped U-bolt (SU)

For stainless steel thin-walled pipe (SU)


Part number A10606 Dipped U-bolt (SU)

Units (mm)

Size code	Size	Applicable pipe outer diameter (SU)	Screw diameter	P	H	S	C	L	t
0015	SU- 13	15.88	$W\frac{1}{4}$	25	23	20	15	51	2.0
0020	SU- 20	22.22	$W\frac{1}{4}$	32	31	25	15	58	2.0
0034	SU- 25	28.58	$W\frac{1}{4}$	38	34	25	15	64	2.0
0049	SU- 30	34.00	$W\frac{3}{8}$	50	40	25	25	92	2.0
0053	SU- 40	42.70	$W\frac{3}{8}$	59	48	30	25	101	2.0
0068	SU- 50	48.60	$W\frac{3}{8}$	65	51	30	25	107	2.0
0072	SU- 60	60.50	$W\frac{3}{8}$	77	57	30	25	119	2.0
0087	SU- 75	76.30	$W\frac{3}{8}$	93	70	35	25	135	2.0
0091	SU- 80	89.10	$W\frac{3}{8}$	105	77	35	25	148	2.0
0104	SU-100	114.30	$W\frac{3}{8}$	130	90	35	25	173	2.0
0119	SU-125	139.80	$W\frac{1}{2}$	160	110	50	32	213	2.0
0123	SU-150	165.20	$W\frac{1}{2}$	186	125	50	32	239	2.0
0138	SU-200	216.30	$W\frac{1}{2}$	238	154	50	32	290	2.0



Coating color: blue ●



Dipped stainless steel U-bolt series —Soft PVC-coated type—

Made to order

Electrically insulated U-bolt / Soft PVC-coated type


A10626 Dipped stainless steel U-bolt (SG)

For SGP pipe

Part number A10626 Dipped stainless steel U-bolt (SG)

Units (mm)

Size code	Size	Nominal diameter	Applicable pipe Outer diameter (SG)	Screw diameter	P	H	S	C	L	t
0319	SG- 15	$\frac{1}{2}$	21.7	$W\frac{3}{8}$	38	32	25	25	80	2.0
0323	SG- 20	$\frac{3}{4}$	27.2	$W\frac{3}{8}$	44	35	25	25	86	2.0
0338	SG- 25	1	34.0	$W\frac{3}{8}$	50	40	25	25	92	2.0
0342	SG- 32	$1\frac{1}{4}$	42.7	$W\frac{3}{8}$	59	48	30	25	101	2.0
0357	SG- 40	$1\frac{1}{2}$	48.6	$W\frac{3}{8}$	65	51	30	25	107	2.0
0361	SG- 50	2	60.5	$W\frac{3}{8}$	77	57	30	25	119	2.0
0376	SG- 65	$2\frac{1}{2}$	76.3	$W\frac{3}{8}$	93	70	35	25	135	2.0
0395	SG- 80	3	89.1	$W\frac{3}{8}$	105	77	35	25	148	2.0
0408	SG-100	4	114.3	$W\frac{3}{8}$	130	90	35	25	173	2.0
0412	SG-125	5	139.8	$W\frac{1}{2}$	160	110	50	32	213	2.0
0427	SG-150	6	165.2	$W\frac{1}{2}$	186	125	50	32	239	2.0
0431	SG-200	8	216.3	$W\frac{1}{2}$	238	150	50	32	290	2.0

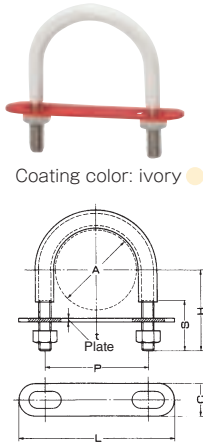


A10626 Dipped stainless steel U-bolt (CU)

For copper pipe

Part number A10626 Dipped stainless steel U-bolt (CU)

Units (mm)

Size code	Size	Applicable pipe Outer diameter (CU)	Screw diameter	P	H	S	C	L	t
0018	CU- 8	9.53	$W\frac{1}{4}$	19	19	18	15	45	2.0
0022	CU- 10	12.70	$W\frac{1}{4}$	22	21	18	15	48	2.0
0037	CU- 15	15.88	$W\frac{1}{4}$	25	23	20	15	51	2.0
0041	CU- 19	19.05	$W\frac{1}{4}$	29	25	20	15	55	2.0
0056	CU- 20	22.22	$W\frac{1}{4}$	32	31	25	15	58	2.0
0446	5 (for air conditioning)	25.40	$W\frac{1}{4}$	35	33	25	15	61	2.0
0075	CU- 25	28.58	$W\frac{1}{4}$	38	34	25	15	64	2.0
0080	CU- 32	34.92	$W\frac{1}{4}$	44	37	25	15	70	2.0
0094	CU- 40	41.28	$W\frac{1}{4}$	51	40	25	15	77	2.0
0107	CU- 50	53.98	$W\frac{1}{4}$	63	46	25	15	89	2.0
0111	CU- 65	66.68	$W\frac{1}{4}$	78	59	30	15	102	2.0
0126	CU- 80	79.38	$W\frac{1}{4}$	89	64	30	15	115	2.0
0145	CU-100	104.78	$W\frac{1}{4}$	114	77	30	15	141	2.0
0150	CU-125	130.18	$W\frac{3}{8}$	143	95	35	25	189	2.0
0164	CU-150	155.58	$W\frac{3}{8}$	169	107	35	25	214	2.0

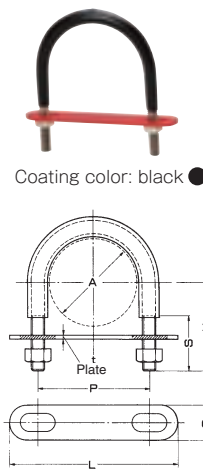


A10626 Dipped stainless steel U-bolt (SU)

For stainless steel thin-walled pipe (SU)

Part number A10626 Dipped stainless steel U-bolt (SU)

Units (mm)

Size code	Size	Applicable pipe Outer diameter (SU)	Screw diameter	P	H	S	C	L	t
0179	SU- 13	15.88	$W\frac{1}{4}$	25	23	20	15	51	2.0
0183	SU- 20	22.22	$W\frac{1}{4}$	32	31	25	15	58	2.0
0198	SU- 25	28.58	$W\frac{1}{4}$	38	34	25	15	64	2.0
0215	SU- 30	34.00	$W\frac{3}{8}$	50	40	25	25	92	2.0
0220	SU- 40	42.70	$W\frac{3}{8}$	59	48	30	25	101	2.0
0234	SU- 50	48.60	$W\frac{3}{8}$	65	51	30	25	107	2.0
0249	SU- 60	60.50	$W\frac{3}{8}$	77	57	30	25	119	2.0
0253	SU- 75	76.30	$W\frac{3}{8}$	93	70	35	25	135	2.0
0268	SU- 80	89.10	$W\frac{3}{8}$	105	77	35	25	148	2.0
0272	SU-100	114.30	$W\frac{3}{8}$	130	90	35	25	173	2.0
0287	SU-125	139.80	$W\frac{1}{2}$	160	110	50	32	213	2.0
0291	SU-150	165.20	$W\frac{1}{2}$	186	125	50	32	239	2.0
0304	SU-200	216.30	$W\frac{1}{2}$	238	150	50	32	286	2.0

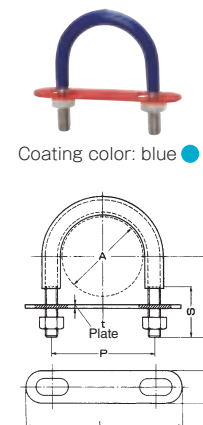

U-fixings

NC U-bolt series


Electrically insulated U-bolt / Nylon powder-coated type

A12114 NC U-bolt (SG)

For SGP pipe

Part number A12114 NC U-bolt (SG)

Units (mm)

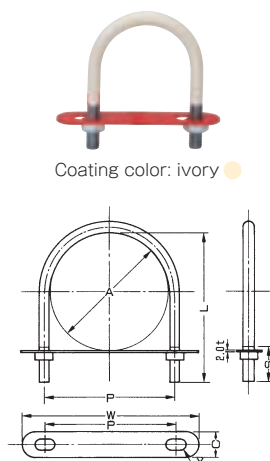


Size code	Size	Nominal diameter	Applicable pipe Outer diameter (SG)	Screw diameter	C	W	X	L	P	S
0019	SG- 15	1/2	21.7	M10	25	80	φ11 × 20L	53	35	30
0023	SG- 20	3/4	27.2	M10	25	86	φ11 × 20L	59	41	30
0038	SG- 25	1	34.0	M10	25	92	φ11 × 20L	65	47	35
0042	SG- 32	1 1/4	42.7	M10	25	101	φ11 × 20L	74	56	35
0057	SG- 40	1 1/2	48.6	M10	25	107	φ11 × 20L	80	62	35
0061	SG- 50	2	60.5	M10	25	119	φ11 × 20L	92	74	35
0076	SG- 65	2 1/2	76.3	M10	25	135	φ11 × 20L	108	90	35
0095	SG- 80	3	89.1	M10	25	148	φ11 × 20L	121	103	35
0108	SG-100	4	114.3	M10	25	173	φ11 × 20L	146	128	35
0112	SG-125	5	139.8	M12	32	213	φ13 × 25L	175	156	40
0127	SG-150	6	165.2	M12	32	239	φ13 × 25L	201	182	40
0131	SG-200	8	216.3	M12	32	290	φ13 × 25L	252	233	40

A12113 NC U-bolt (CU)

For copper pipe

Part number A12113 NC U-bolt (CU)

Units (mm)

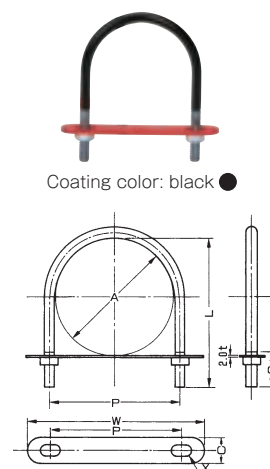


Size code	Size	Applicable pipe outer diameter (CU)	Screw diameter	C	W	X	L	P	S
0011	CU- 8	9.52	M 6	15	45	φ 7 × 12L	35	18	25
0026	CU- 10	12.70	M 6	15	48	φ 7 × 12L	38	21	25
0045	CU- 15	15.88	M 6	15	51	φ 7 × 12L	41	24	25
0050	CU- 19	19.05	M 6	15	55	φ 7 × 12L	45	28	25
0064	CU- 20	22.22	M 6	15	58	φ 7 × 12L	48	31	25
0079	No. 5	25.40	M 6	15	61	φ 7 × 12L	51	34	25
0083	CU- 25	28.58	M 6	15	64	φ 7 × 12L	54	37	25
0098	CU- 32	34.92	M 6	15	70	φ 7 × 12L	60	43	30
0115	CU- 40	41.28	M 6	15	77	φ 7 × 12L	67	50	30
0120	CU- 50	53.98	M 6	15	89	φ 7 × 12L	79	62	30
0134	CU- 65	66.68	M 6	15	102	φ 7 × 12L	92	75	30
0149	CU- 80	79.38	M 6	15	115	φ 7 × 12L	105	88	30
0153	CU-100	104.78	M 6	15	141	φ 7 × 12L	130	114	30
0168	CU-125	130.18	M10	25	189	φ 11 × 20L	162	144	35
0172	CU-150	155.58	M10	25	214	φ 11 × 20L	187	169	35

A12115 NC U-bolt (SU)

For stainless steel thin-walled pipe (SU)

Part number A12115 NC U-bolt (SU)

Units (mm)

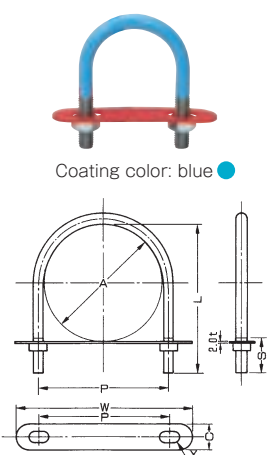

Size code	Size	Applicable pipe outer diameter (SU)	Screw diameter	C	W	X	L	P	S
0016	SU- 13	15.88	M 6	15	51	φ 7 × 12L	41	24	25
0035	SU- 20	22.22	M 6	15	58	φ 7 × 12L	48	31	25
0040	SU- 25	28.58	M 6	15	64	φ 7 × 12L	54	37	25
0054	SU- 30	34.00	M10	25	92	φ11 × 20L	65	47	35
0069	SU- 40	42.70	M10	25	101	φ11 × 20L	74	56	35
0073	SU- 50	48.60	M10	25	107	φ11 × 20L	80	62	35
0088	SU- 60	60.50	M10	25	119	φ11 × 20L	92	74	35
0092	SU- 75	76.30	M10	25	135	φ11 × 20L	108	90	35
0105	SU- 80	89.10	M10	25	148	φ11 × 20L	121	103	35
0110	SU-100	114.30	M10	25	173	φ11 × 20L	146	128	35
0124	SU-125	139.80	M12	32	213	φ13 × 25L	175	156	40
0139	SU-150	165.20	M12	32	239	φ13 × 25L	201	182	40
0143	SU-200	216.30	M12	32	290	φ13 × 25L	252	233	40


A10598 U-band

U-band for SGP pipe

Part number A10598 U-band

Units (mm)

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	t	C	P	H	S
0011	15A	1/2	21.7	W 3/8	2.0	25	36	50.0	42.0
0026	20A	3/4	27.2	W 3/8	2.0	25	41	51.5	42.0
0045	25A	1	34.0	W 3/8	2.0	25	48	54.5	40.5
0050	32A	1 1/4	42.7	W 3/8	2.0	25	57	53.0	40.5
0064	40A	1 1/2	48.6	W 3/8	2.0	25	59	60.5	38.0
0079	50A	2	60.5	W 3/8	2.0	25	72	62.5	38.0
0083	65A	2 1/2	76.3	W 3/8	2.0	25	86	69.5	38.0
0098	80A	3	89.1	W 3/8	2.0	25	98	76.5	38.0
0115	100A	4	114.3	W 3/8	2.0	25	123	89.0	38.0
0120	125A	5	139.8	W 1/2	3.2	32	160	110	55.0
0134	150A	6	165.2	W 1/2	3.2	32	185	123	55.0

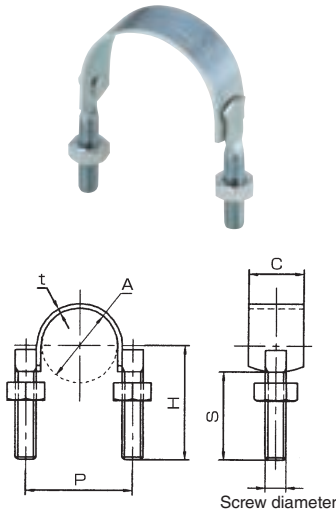


A10618 Stainless steel U-band

U-band for stainless steel pipe (thick-walled)

Part number A10618 Stainless steel U-band

Units (mm)

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	t	C	P	H	S
0016	15A	1/2	21.7	W 3/8	2.0	25	36	50.1	41.5
0035	20A	3/4	27.2	W 3/8	2.0	25	41	52.0	41.5
0040	25A	1	34.0	W 3/8	2.0	25	48	52.5	40.0
0054	32A	1 1/4	42.7	W 3/8	2.0	25	57	54.0	40.0
0069	40A	1 1/2	48.6	W 3/8	2.0	25	59	60.0	38.0
0073	50A	2	60.5	W 3/8	2.0	25	72	62.0	38.0
0088	65A	2 1/2	76.3	W 3/8	2.0	25	86	69.0	38.0
0092	80A	3	89.1	W 3/8	2.0	25	98	75.0	38.0
0105	100A	4	114.3	W 3/8	2.0	25	123	89.0	38.0
0110	125A	5	139.8	W 1/2	3.0	32	160	110	55.0
0124	150A	6	165.2	W 1/2	3.0	32	185	123	55.0

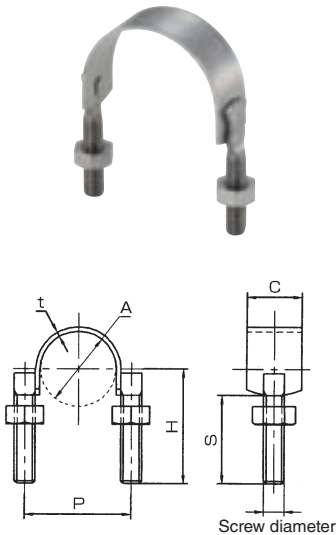


A10633 Dip-plated U-band

U-band for SGP pipe

Part number A10633 Dip-plated U-band


Units (mm)

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	t	C	P	H	S
0012	15A	1/2	21.7	W 3/8	2.0	25	36	50.0	42.0
0027	20A	3/4	27.2	W 3/8	2.0	25	41	51.5	42.0
0031	25A	1	34.0	W 3/8	2.0	25	48	54.5	40.5
0046	32A	1 1/4	42.7	W 3/8	2.0	25	57	53.0	40.5
0065	40A	1 1/2	48.6	W 3/8	2.0	25	59	60.5	38.0
0070	50A	2	60.5	W 3/8	2.0	25	72	62.5	38.0
0084	65A	2 1/2	76.3	W 3/8	2.0	25	86	69.5	38.0
0099	80A	3	89.1	W 3/8	2.0	25	98	76.5	38.0
0101	100A	4	114.3	W 3/8	2.0	25	123	89.0	38.0
0116	125A	5	139.8	W 1/2	3.2	32	160	110	55.0
0135	150A	6	165.2	W 1/2	3.2	32	185	123	55.0

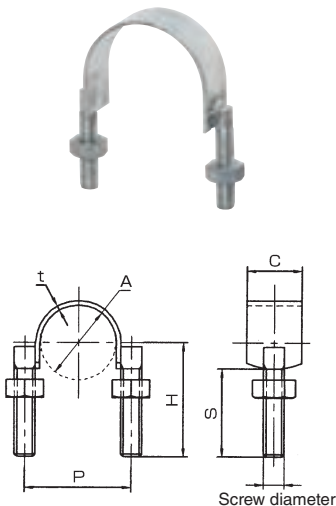

U-fixings

A10609 U-band for TN pipe

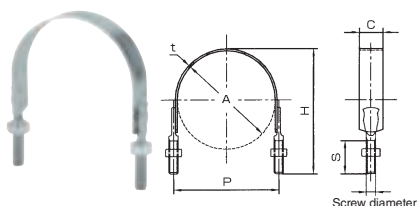

U-band for fireproof double-layer pipe (FDP)

Part number A10609 U-band for TN pipe


Units (mm)

Size code	Size	Applicable pipe outer diameter	Screw diameter	t	C	P	H	S
0017	40	61・63・65	M10	2.0	25	74	95	35
0021	50	73・75・77	M10	2.0	25	86	100	35
0036	65	89・91・93	M10	2.0	25	102	118	35
0055	75	102・104・106	M10	2.0	25	116	132	35
0060	100	129・131・133	M10	2.0	25	142	163	35
0074	125	155・158・161	W $\frac{1}{2}$	3.2	32	180	190	55
0089	150	182・185・188	W $\frac{1}{2}$	3.2	32	205	220	55
0125	200	236	W $\frac{1}{2}$	3.2	32	255	279	55

*For TNF type, specify A15375 U-band for TNF pipe.

A10629 Stainless steel U-band for TN pipe

Made to order

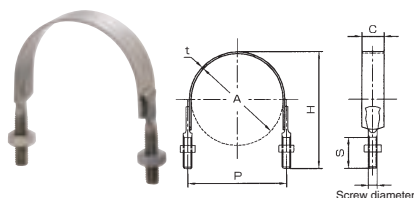


U-band for fireproof double-layer pipe (FDP)

Part number A10629 Stainless steel U-band for TN pipe

Units (mm)

Size code	Size	Applicable pipe outer diameter	Screw diameter	t	C	P	H	S
0010	40	61・63・65	W $\frac{3}{8}$	2.0	25	79	93	35
0024	50	73・75・77	W $\frac{3}{8}$	2.0	25	92	107	35
0039	65	89・91・93	W $\frac{3}{8}$	2.0	25	105	124	35
0043	75	102・104・106	W $\frac{3}{8}$	2.0	25	115	137	35
0058	100	129・131・133	W $\frac{3}{8}$	2.0	25	145	164	35
0062	125	155・158・161	W $\frac{1}{2}$	3.0	32	180	202	55
0077	150	182・185・188	W $\frac{1}{2}$	3.0	32	206	230	55

A22724 U-band for SP pipe

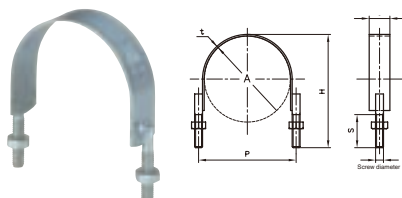


U-band for spiral duct

Part number A22724 U-band for SP pipe

Units (mm)

Size code	Size	Applicable pipe outer diameter	Screw diameter	t	C	P	H	S
0011	SP- 75	80	W $\frac{3}{8}$	1.6	32	93	110	40
0026	SP-100	103	W $\frac{3}{8}$	1.6	32	116	133	40
0045	SP-125	128	W $\frac{3}{8}$	1.6	32	141	158	40
0050	SP-150	153	W $\frac{3}{8}$	1.6	32	166	183	40
0064	SP-175	178	W $\frac{3}{8}$	1.6	32	191	208	40
0079	SP-200	203	W $\frac{3}{8}$	1.6	32	216	234	40
0083	SP-225	228	W $\frac{3}{8}$	1.6	32	241	259	40
0098	SP-250	253	W $\frac{3}{8}$	1.6	32	266	285	40
0115	SP-275	278	W $\frac{3}{8}$	1.6	32	291	313	40
0120	SP-300	303	W $\frac{3}{8}$	1.6	32	316	332	40

A22725 Stainless steel U-band for SP pipe

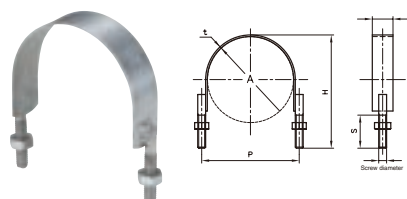


U-band for spiral duct

Part number A22725 Stainless steel U-band for SP pipe


Units (mm)

Size code	Size	Applicable pipe outer diameter	Screw diameter	t	C	P	H	S
0019	SP- 75	80	W $\frac{3}{8}$	1.5	32	93	110	40
0023	SP-100	103	W $\frac{3}{8}$	1.5	32	116	133	40
0038	SP-125	128	W $\frac{3}{8}$	1.5	32	141	158	40
0042	SP-150	153	W $\frac{3}{8}$	1.5	32	166	183	40
0057	SP-175	178	W $\frac{3}{8}$	1.5	32	191	208	40
0061	SP-200	203	W $\frac{3}{8}$	1.5	32	216	234	40
0076	SP-225	228	W $\frac{3}{8}$	1.5	32	241	259	40
0095	SP-250	253	W $\frac{3}{8}$	1.5	32	266	285	40
0108	SP-275	278	W $\frac{3}{8}$	1.5	32	291	313	40
0112	SP-300	303	W $\frac{3}{8}$	1.5	32	316	332	40

Anti-vibration U-band

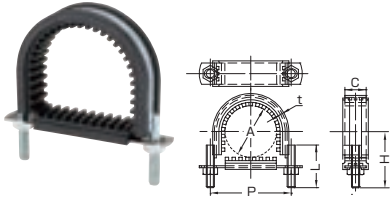

Anti-vibration U-band with plate

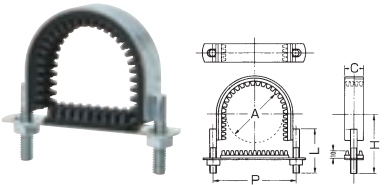

A10616 Anti-vibration U-band

Confirm delivery

A12090 Anti-vibration U-band with plate

Confirm delivery

Anti-vibration supplementary U-band for SGP pipe / With 10 mm rubber

Part number A10616 Anti-vibration U-band

A12090 Anti-vibration U-band with plate

Units (mm)

Size code		Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	t	C	P	H	L
A10616	A12090									
0026	0020	20A	$\frac{3}{4}$	27.2	$W\frac{3}{8}$	2.3	25	61	44	30
0045	0034	25A	1	34.0	$W\frac{3}{8}$	2.3	25	68	47	30
0050	0049	32A	$1\frac{1}{4}$	42.7	$W\frac{3}{8}$	2.3	25	77	52	30
0064	0053	40A	$1\frac{1}{2}$	48.6	$W\frac{3}{8}$	2.3	25	83	60	35
0079	0068	50A	2	60.5	$W\frac{3}{8}$	2.3	25	95	66	35
0083	0072	65A	$2\frac{1}{2}$	76.3	$W\frac{3}{8}$	2.6	25	111	80	35
0098	0087	80A	3	89.1	$W\frac{3}{8}$	2.6	25	124	85	35
0115	0091	100A	4	114.3	$W\frac{3}{8}$	2.6	25	149	102	35
0120	0104	125A	5	139.8	$W\frac{1}{2}$	4.5	32	181	130	60
0134	0119	150A	6	165.2	$W\frac{1}{2}$	4.5	32	207	145	60

The shape of the rubber may change for larger diameters.


A10631 Stainless steel anti-vibration U-band

Made to order


A13153 Anti-vibration stainless steel U-band (with new-type rubber plate)

Made to order

Stainless steel anti-vibration U-band

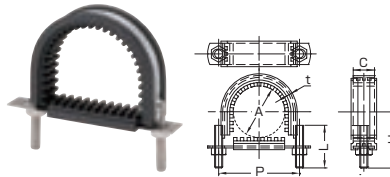

Anti-vibration stainless steel U-band with plate

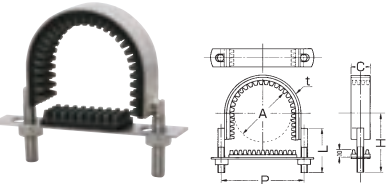

Anti-vibration supplementary U-band for SGP pipe / With 10 mm rubber

Part number A10631 Stainless steel anti-vibration U-band

A13153 Anti-vibration U-band (with new-type rubber plate)

Units (mm)

Size code		Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	t	C	P	H	L
A10631	A13153									
0022	0026	20A	$\frac{3}{4}$	27.2	$W\frac{3}{8}$	2.0	25	61	54	50
0037	0045	25A	1	34.0	$W\frac{3}{8}$	2.0	25	68	57	50
0041	0050	32A	$1\frac{1}{4}$	42.7	$W\frac{3}{8}$	2.0	25	77	61	50
0056	0064	40A	$1\frac{1}{2}$	48.6	$W\frac{3}{8}$	2.0	25	83	64	50
0075	0079	50A	2	60.5	$W\frac{3}{8}$	2.0	25	96	70	50
0080	0083	65A	$2\frac{1}{2}$	76.3	$W\frac{3}{8}$	2.0	25	111	78	60
0094	0098	80A	3	89.1	$W\frac{3}{8}$	2.0	25	124	85	65
0107	0115	100A	4	114.3	$W\frac{3}{8}$	2.0	25	149	97	65
0111	0120	125A	5	139.8	$W\frac{1}{2}$	3.0	32	181	119	80
0126	0134	150A	6	165.2	$W\frac{1}{2}$	3.0	32	207	132	80

The shape of the rubber may change for larger diameters.

U-fixings


U-clamp series

A10612 Steel U-clamp (Type 1)

Mounting bracket for thermal expansion points on SGP pipe

Part number A10612 Steel U-clamp (Type 1)

Units (mm)

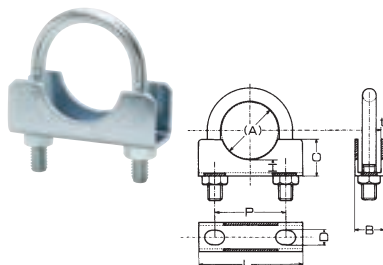


Size code	Diameter size (A)	Applicable pipe outer diameter	Screw diameter	B	C	D	L	P	t	H
0012	20A	27.2	W $\frac{3}{8}$	30	20	11	64	40	3.2	12
0027	25A	34.0	W $\frac{3}{8}$	30	25	11	72	46	3.2	12
0031	32A	42.7	W $\frac{3}{8}$	30	30	11	82	56	3.2	12
0046	40A	48.6	W $\frac{1}{2}$	35	35	16	98	66	4.5	15
0065	50A	60.5	W $\frac{1}{2}$	40	40	16	110	78	4.5	15
0070	65A	76.3	W $\frac{1}{2}$	45	50	16	126	94	6.0	20
0084	80A	89.1	W $\frac{1}{2}$	45	60	16	138	106	6.0	20
0099	100A	114.3	W $\frac{1}{2}$	50	70	16	164	132	6.0	25

A10613 Cast U-clamp (Type 1)

Mounting bracket for thermal expansion points on SGP pipe

Part number A10613 Cast U-clamp (Type 1)

Units (mm)

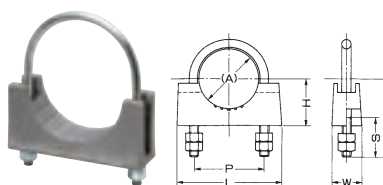

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	P	H	S	W	L	E
0010	125A	5	139.8	W $\frac{3}{8}$	162	99	65	60	202	159
0024	150A	6	165.2	W $\frac{3}{8}$	188	112	65	68	228	172
0039	200A	8	216.3	W $\frac{3}{8}$	240	138	65	68	280	198


*Manufacture discontinued for 250A and above

A10614 Steel U-clamp (Type 2)

Mounting bracket for thermal expansion points on SGP pipe

Part number A10614 Steel U-clamp (Type 2)

Units (mm)

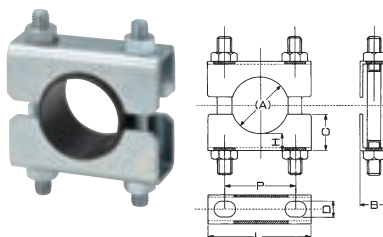


Size code	Diameter size (A)	A	B	C	D	L	P	t	H	W	Applicable bolts for Type 2
0017	20A	27.2	30	20	11	64	40	3.2	12	$\frac{3}{8}$	W $\frac{3}{8}$ × 90
0021	25A	34.0	30	25	11	72	46	3.2	12	$\frac{3}{8}$	W $\frac{3}{8}$ × 100
0036	32A	42.7	30	30	11	82	56	3.2	12	$\frac{3}{8}$	W $\frac{3}{8}$ × 100
0055	40A	48.6	35	35	16	98	66	4.5	15	$\frac{1}{2}$	W $\frac{1}{2}$ × 125
0060	50A	60.5	40	40	16	110	78	4.5	15	$\frac{1}{2}$	W $\frac{1}{2}$ × 135
0074	65A	76.3	45	50	16	126	94	6.0	20	$\frac{1}{2}$	W $\frac{1}{2}$ × 160
0089	80A	89.1	45	60	16	138	106	6.0	20	$\frac{1}{2}$	W $\frac{1}{2}$ × 175
0093	100A	114.3	50	70	16	164	132	6.0	25	$\frac{1}{2}$	W $\frac{1}{2}$ × 210

A10615 Cast U-clamp (Type 2)

Mounting bracket for thermal expansion points on SGP pipe

Part number A10615 Cast U-clamp (Type 2)

Units (mm)

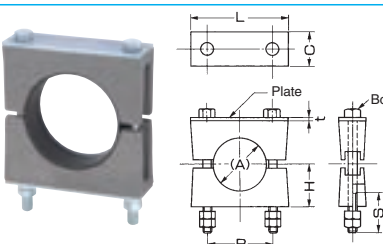

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Bolts used	P	H	S	Plate dimensions		
0014	125A	5	139.8	M16 × 255	162	99	65	t	C	L
0029	150A	6	165.2	M16 × 285	188	112	65	4.5	68	202
0033	200A	8	216.3	M16 × 330	240	138	65	4.5	68	280


*Manufacture discontinued for 250A and above

A11225 U-bolt for clamp base

U-bolt for U-clamp (Type 1)

Part number A11225 U-bolt for clamp base

Units (mm)

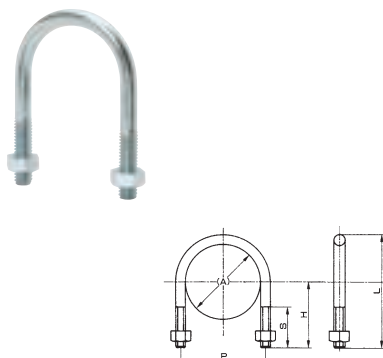

Size code	Diameter size (A)	Nominal diameter (B)	Applicable pipe outer diameter	Screw diameter	L	P	H	S
0013	20A	$\frac{3}{4}$	27.2	W $\frac{3}{8}$	75	40	53	35
0028	25A	1	34.0	W $\frac{3}{8}$	85	46	60	35
0032	32A	1 $\frac{1}{4}$	42.7	W $\frac{3}{8}$	93	56	64	35
0047	40A	1 $\frac{1}{2}$	48.6	W $\frac{1}{2}$	110	66	75	45
0051	50A	2	60.5	W $\frac{1}{2}$	120	78	79	45
0066	65A	2 $\frac{1}{2}$	76.3	W $\frac{1}{2}$	130	94	81	50
0085	80A	3	89.1	W $\frac{1}{2}$	156	106	101	50
0090	100A	4	114.3	W $\frac{1}{2}$	190	132	122	50
0102	125A	5	139.8	W $\frac{3}{8}$	239	162	155	65
0117	150A	6	165.2	W $\frac{3}{8}$	265	188	168	65
0121	200A	8	216.3	W $\frac{5}{8}$	315	240	193	65
0136	250A	10	267.4	W $\frac{5}{8}$	367	292	219	65
0155	300A	12	318.5	W $\frac{3}{4}$	435	350	259	100